



外球面轴承


insert bearing



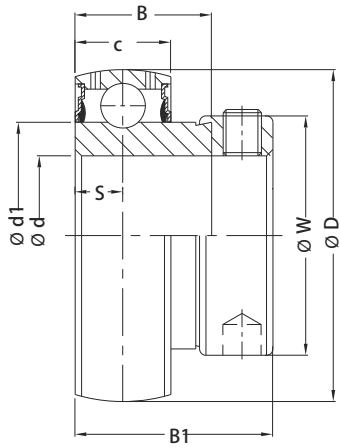

R3 SEAL

F SEAL



TWO TOUCH SEAL

SA200

轴径 (d)

(min.) | (mm)

轴承型号

外形尺寸 (mm)

D

C

B

B1

S

d1

止动螺钉规格
(mm)
(UN)

载荷 (Kgf)

Cr

Cor

重量

轴径 (d)	轴径 (d) (min.)	轴承型号	D	C	B	B1	S	d1	止动螺钉规格 (mm) (UN)	Cr	Cor	重量
1/2	12	SA201	40	12	19,1	28,6	6,5	28,6	M6x1,0	970	490	0,14
	15	201-8										
5/8	17	202										
		202-10										
11/16		203										
		203-11										
3/4	20	SA204-12	47	14	21,4	30,9	7,5	33,3	M6x1,0	1310	680	0,18
		204										
7/8	25	SA205-14	52	15	21,4	30,9	7,5	38,1	M6x1,0	1430	800	0,19
		205-15										
15/16		205										
		205-16										
1	30	SA206-18	62	16	23,8	35,7	9	44,5	M6x1,0	2000	1140	0,33
		206										
1-1/8		206-19										
1-3/16		206-20										
1-1/4	35	SA207-20	72	17	25,4	38,9	9,5	55,6	M8x1,0	2640	1550	0,51
		207-21										
1-5/16		207-22										
1-3/8		207										
		207-23										
1-7/1	40	SA208-24	80	18	30,2	43,7	11	60,3	M8x1,0	2990	1860	0,67
		208-25										
1-1/2		208										
1-9/16	45	SA209-26	85	19	30,2	43,7	11	63,5	M8x1,0	3350	2120	0,73
		209-27										
1-5/8		209-28										
1-11/16		209										
1-3/4	50	SA210-30	90	20	30,2	43,7	11	69,9	M8x1,0	3600	2370	0,79
		210-31										
1-7/8		210										
1-15/16		201-32										
2	55	SA211-32	100	24	32,5	48,4	12	76,2	M10x1,25	4400	2980	1,07
		211-34										
2-1/8		211										
		211-35										
2-3/16	60	SA212-36	110	24	33,4	49,3	12	84,2	M10x1,25	5350	3350	1,20
		212										
2-1/4		212-38										
2-3/8		212-39										
2-7/16												